


33 759 High Profile, Pull Out - WaterCare



Description

GROHE WaterCare - 30% Water Savings. IAPMO Green Certified
GROHE SilkMove® Ceramic Cartridge
360° Swivel Spout
Dual Spray Control - switches back and forth between regular flow and spray
Variable Handle Positioning (left, right, or center and all points in between)
SpeedClean® Anti-Lime System
56" Extractable Hose
10 3/8" Spout Reach
Quick Installation System
Stainless Steel braided flexible supplies
Integral Check Valves
Single Hole Installation
IAPMO File #1750

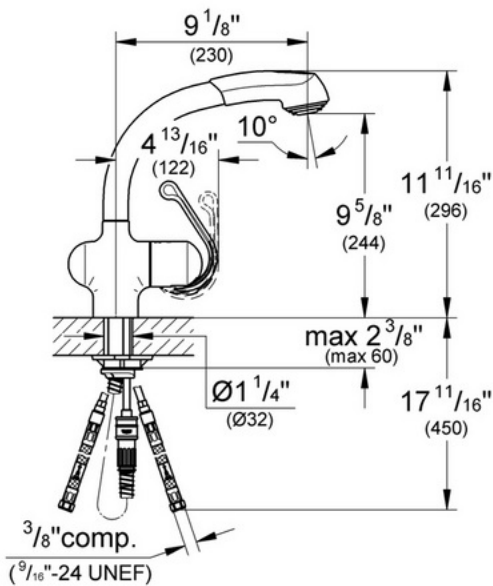

Flow Rate

1.5 gpm

Code Compliance

ASME/ANSI A112.18.1M
ANSI/NSF Standard 61
CSA Standard B125.1-05
ADA Compliant

Finish Options

33 759 SDE Stainless Steel