


# Ladylux Pro 32 244

## Dual Spray Pull Down

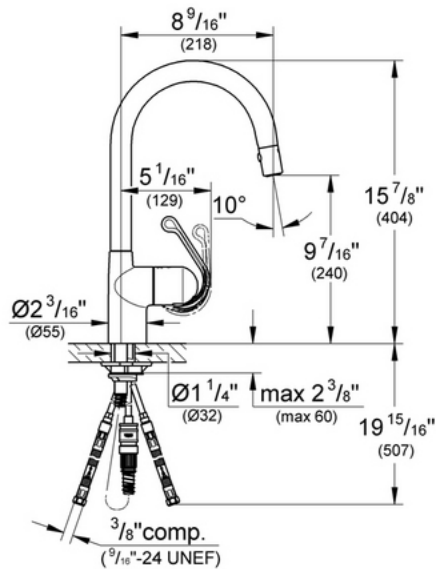

### Description

GROHE SilkMove® ceramic cartridge  
 SpeedClean anti-lime system  
 Push Button Control - to switch from regular flow to spray  
 Quick installation system  
 Single lever handle  
 Variable handle positioning  
 Stainless steel braided flexible supplies  
 56" extractable hose  
 8 9/16" spout reach  
 360° swivel spout

IAPMO file # 1750

Installation note: For full handle movement when mounted in front of a wall or backsplash, this faucet must be installed with no less than 3 1/4" of clearance between the faucet and backsplash or wall, unless the faucet is installed with the handle facing forward (handle opposite the wall).

### Flow Rate

2.2 gpm at 45 psi, 2.5 gpm at 80 psi  
 (9.5 lpm)

### Code Compliance

- \* ASME/ANSI A112.18.1M
- \* ANSI/NSF Standard 61
- \* ADA Compliant

### Finish Options

- 32 244 OOO Starlight® Chrome
- 32 244 DCO SuperSteel